

QUICK GUIDE

BUBBLE SENSOR



DESCRIPTION

In this quick guide, we want to explain how to connect the air bubble detection sensor cables.


ATTENTION!

A maintenance technician is required to carry out the process. If you are not careful, you risk creating damage to the component, for which DAV Tech is not responsible.

Air bubble detection sensors are used to detect discontinuities within the pipes themselves, to send a signal to the air bubble control system, to enable a system installed further downstream for the removal of the bubble itself. Below are some technical features

SPECIFICATIONS		
Description	UdM	Values
General features		
Minimum size of detected bubbles	\	Bubbles must be Ø1/3 pipes diameter
Detection Cycle	µs	200
Type of fluids	\	Low viscosity without solid material
Type of protection	\	IP 67
Electrical Characteristics		
Continuous supply voltage	V	12 ÷ 30
Current consumption	mA	50
Wiring type	\	M12 3-pole
Thermal characteristics		
Working Temperature	°C	5 ÷ 60
Storage Temperature	°C	-20 ÷ 70

CONNECTION FEATURES		PIN
Cable color	Description	
BLUE	GND	
BROWN	12 ÷ 30 VDC power supply	
BLACK	PNP output max 150 mA	
WHITE	Service: Analog Control Input (5V/TTL)	
GREY	Service: Analog Control Output (5V/TTL)	


DANGER!


Be careful with direct current (DC) wiring, as reversing the cables will damage the component, damaging it permanently, and may also cause fire.


ATTENTION!

You are asked to work in the absence of voltage when wiring

WIRING

CONNECTION TO PLC

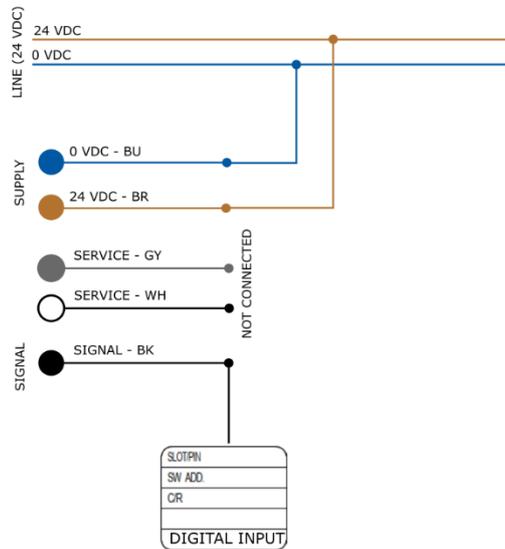

APPLICATION NOTES:

1. For connection to PLCs, you need to see the wiring diagram of the project to actually understand where they need to be connected precisely. If it is an external wiring diagram, ask the manufacturer for more information.



DAV TECH SRL

Via Ravizza, 30
36075, Montecchio Maggiore,
VICENZA – ITALY

Tel. +39 0444 574510
Fax. +39 0444 574324

davtech@davtech.it
www.davtech.it

DAV TECH POLAND SP. ZO.O.

Ul. Krakowska, 116
32-083, Balice
POLAND

Tel. +48 12 278 50 76

davtech@davtech.pl
www.davtech.pl

Follow us on

